

INSTRUCTION FOR INSTALLATION OF FILM ON A WRAPPER

Dear Customer,

You must have noticed that film often breaks when a pallet with goods is being wrapped.
This is usually due to improper handling of the film.

Our guide will help you avoid this problem.

HOW TO REMOVE THE FILM FROM THE PALLET


1. Start by properly cutting the film that the pallet is wrapped in.
Use a safe knife.
Cut the film up to a half of the height of the pallet wrapped in the film on its longer side.



2. Remember: Cut the foil between two rolls.
Otherwise, you may damage the film on the pallet.




3. Carefully remove the stretch film roll from the pallet, preferably with both hands.
Always put the film on the core and never on the edge of the wrapped film in order to avoid damaging the film.

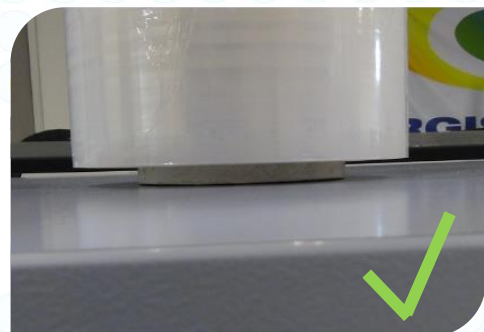

HOW TO INSTALL THE FILM ON THE WRAPPER

1. Make sure that the film is not defective. If you notice any defects, unwrap some material until the defects disappear.
2. Find the diagram showing the installation of film on the wrapper and follow the instructions. Pay attention to the direction in which the film should be unwrapped.

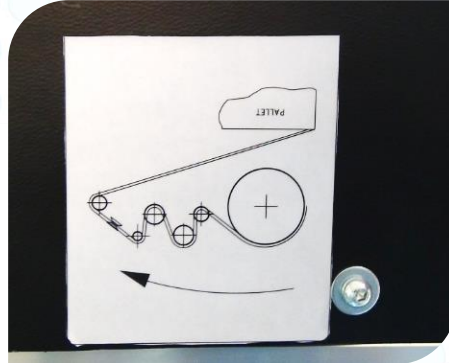

An example of a diagram showing the installation of film

3. Put a roll of stretch film onto the wrapper trolley.
Try to control the appearance of the film as much as possible.



4. Pull the film band between the pulling rolls as shown in the diagram.
5. Install the roll on the film welding and cutting mechanism. If your wrapper does not have it, you can tie the band of the film to the pallet with the goods.

**Have you managed to do it? Great!
Now you can start wrapping the pallet.**